

## Technical Bulletin

### Fujitsu 3600 Second-Video Interface Cards

HW-TECH-11:01  
January 19, 2011

Because of cost and supply issues, StoreNext may ship dealers a second-video “kit” for the 3600 that contains extra parts. These parts would be appropriate for a TeamPoS 3000 XE card, but unnecessary for the 3600, which uses a different card bracket setup.

Just in case you have any questions, the following pages show you how to handle cases where you open the box and find that you got the “bonus components” version.


(Hint: see Page 3 for details and diagrams regarding “dispose of excess parts...”)

## 11001990, VIDEO ADD-IN CARD INSTALLATION

The video card comes with a full height PCI bracket installed, VGA connector and cable and a separate ½ height bracket.



The full height bracket and VGA cable and connector must be removed and replaced by the ½ height bracket.

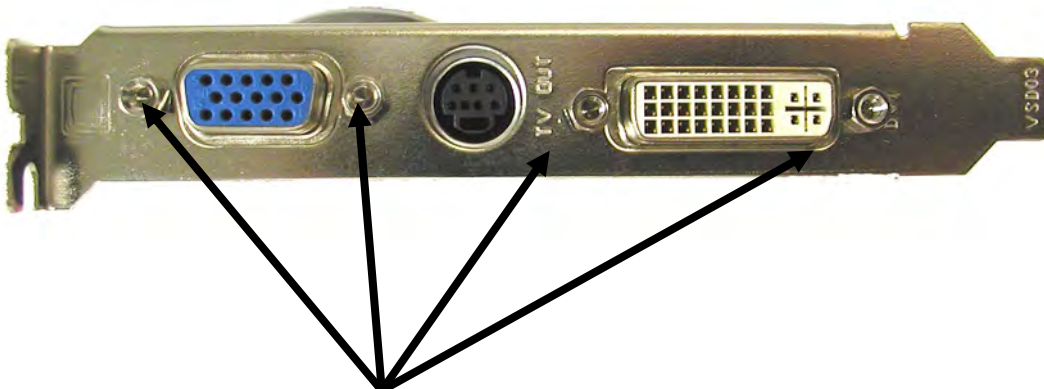


4 jack screws holding bracket

Remove the 4 jack screws and bracket




Remove cable with VGA connector

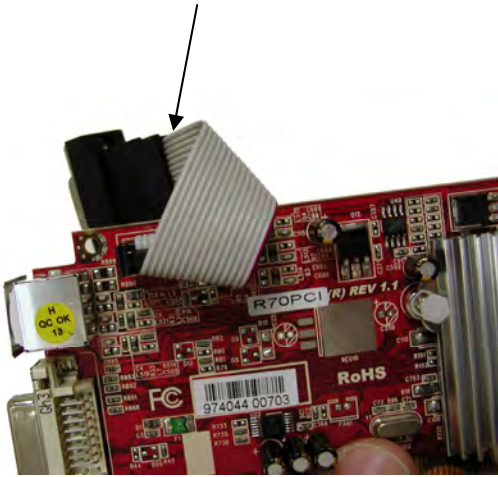

Install ½ height bracket using two of the 4 removed screws

Ensure connector is oriented as shown.

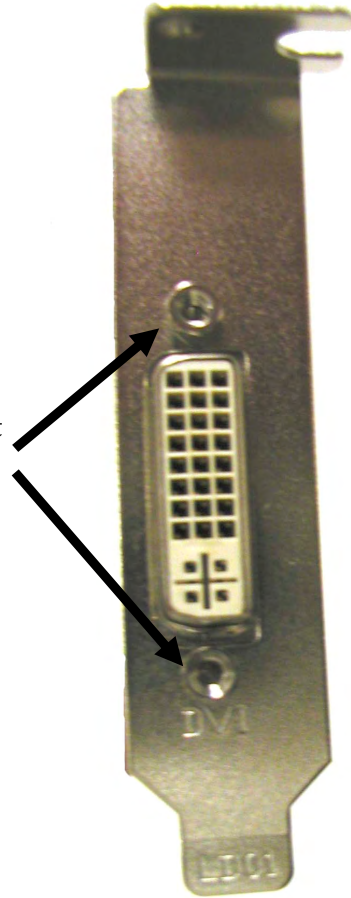

Dispose of excess parts



Install the video card in the center slot of the TeamPoS 3000 XE as you would any other PCI-add-in card

