



■ *ISS45 Office Installation Guide, MFS2*
■ *Version 8.1.8.0*



ISS45 Office Installation Guide, MFS2

Date of Issue	Product ID Num.	Part Number	Brief Description
June 2002	45001/032	89000100	Updated for 8.4 Release
September 2002	45001/032	89000110	Updated
February 2011	45001/032	89000614	8152-050 Release
May 2011	45001/032	89000644	8152-050 Release
January 2012	45001/032	89000704	8060-050 Release
August 2013	45001/032	89000774	8170 Release
June 2015	45001/032	89000841	Version 8.1.8.0

**©Copyright NCR Corporation 1995-2015
All rights reserved**

This publication is protected by federal copyright law. This document and its contents are the proprietary, confidential information and property of NCR Corporation ("NCR"). Unauthorized disclosure, reproduction, distribution or use of this document and/or its contents in any form is strictly prohibited. No part of this publication may be reproduced or transmitted into any human or computer language in any form or by any means, stored in a retrieval system, transmitted, redistributed, translated or disclosed to third parties, or de-compiled in any way including, but not limited to, photocopy, photograph, electronic, mechanical, magnetic or manual without the express written permission of NCR or its licensors, if any. This document, notwithstanding the above, may be distributed in electronic or printed form by NCR to personnel who are employed by either (a) a licensee and end user of the subject system of this document or (b) personnel from an authorized NCR Channel Partner or Solution Provider of the subject system of this document. All copies of this document so distributed and/or so authorized, shall contain a full copy of this copyright notice.

NCR has prepared this document as a guide to the proper installation, operation, customization and/or maintenance of NCR products. The drawings and specifications contained herein are the property of NCR and/or its licensors.

NCR endeavors to ensure that the information in this document is correct and fairly stated but does not accept liability for any error or omission. NCR makes no representation or warranties with respect to the contents hereof, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose or non-infringement. No commitments by NCR or its suppliers are made by or from this documentation which is provided for information only.

Development of NCR products and documentation is continuous: NCR reserves the right to revise this publication and to make changes at any time to the contents hereof or to the products herein described or discussed without notice and without any obligation for NCR to notify any person or organization of such revision or changes. Information published in this document will likely be superseded, and it is recommended that users regularly check for updates and newer versions.

The trademarks NCR, Retailix, StoreNext, ISS45, ScanMaster, R10, ACS, PocketOffice, RPO, RBO, ABO, Connected Payments, ServerEPS, Connected Services, Connected Loyalty, WinEPS and all other NCR product names are registered trademarks or trademarks of NCR; all other trademarks or registered trademarks are the property of their respective owners. Third-party products, services, or company names referenced in this document may be trademarked or copyrighted by their respective owners, and are for identification purposes only. Copyrights, trademarks and license agreements shall be governed and construed in accordance with the laws of the State of New York and the Federal Arbitration Act, and shall benefit NCR, its successors, and assigns.

Address comments and corrections regarding this document to:

Attn: Software Program Director
NCR
797 Commonwealth Drive
Warrendale, PA 15086


Installing ISS45 Version 8 Front Office on MFS2

It is recommended that the Administrator User be logged into Windows when installing ISS45 v8.

Warning:

Do not install the HASP plug until after step 21 (when the system reboots).


1 Run **Setup.exe** from the Front Office\Disk 1 folder

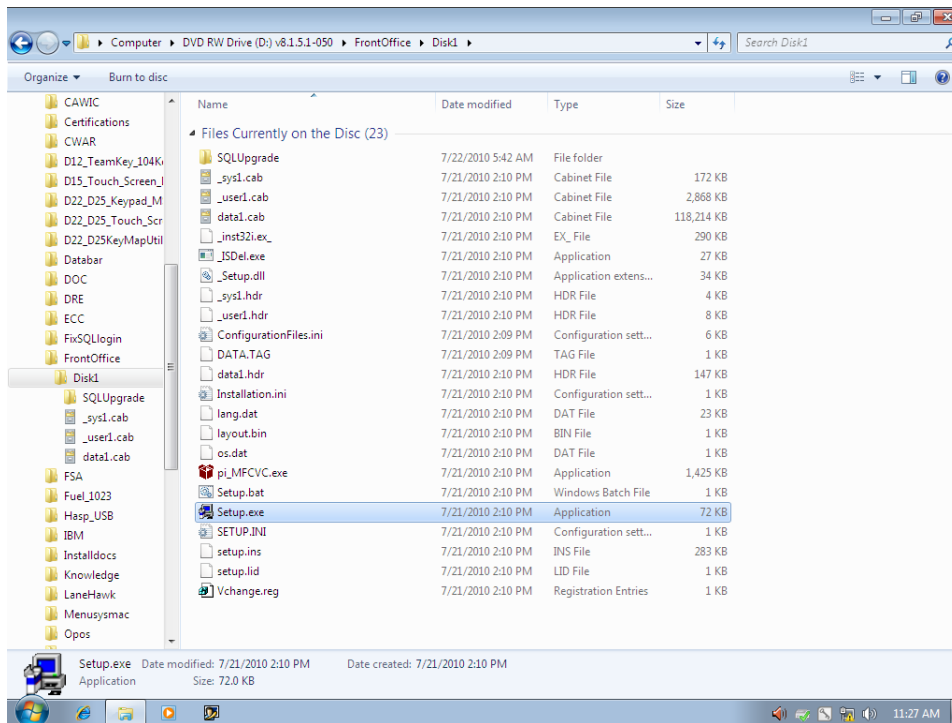

2 Click **Next**.

ISS45 Office Installation


Version: 8.1.5.2-046

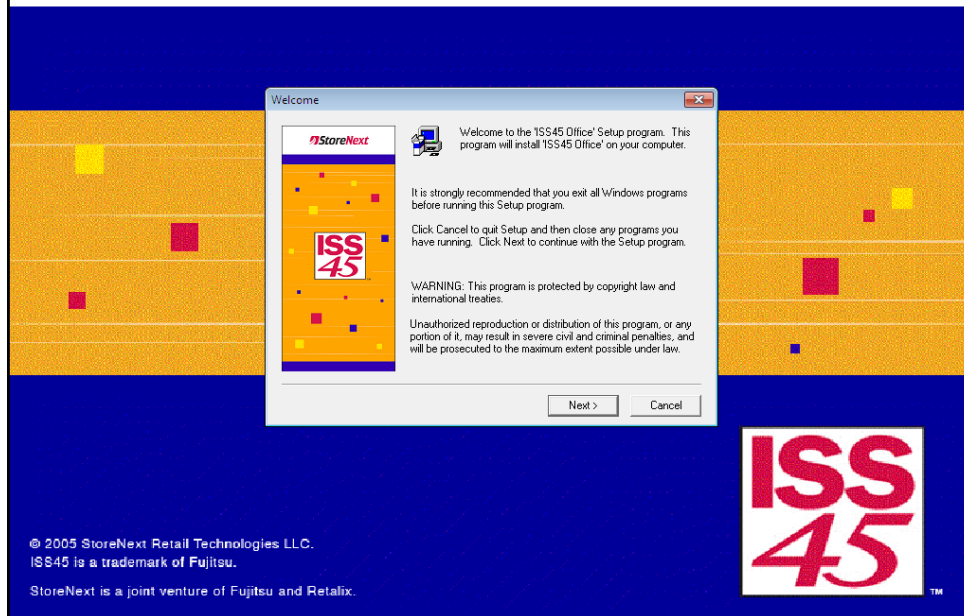


- 3 Enter Customer Name and Company Information and click **Next**.

ISS45 Office Installation


Version: 8.1.5.2-046

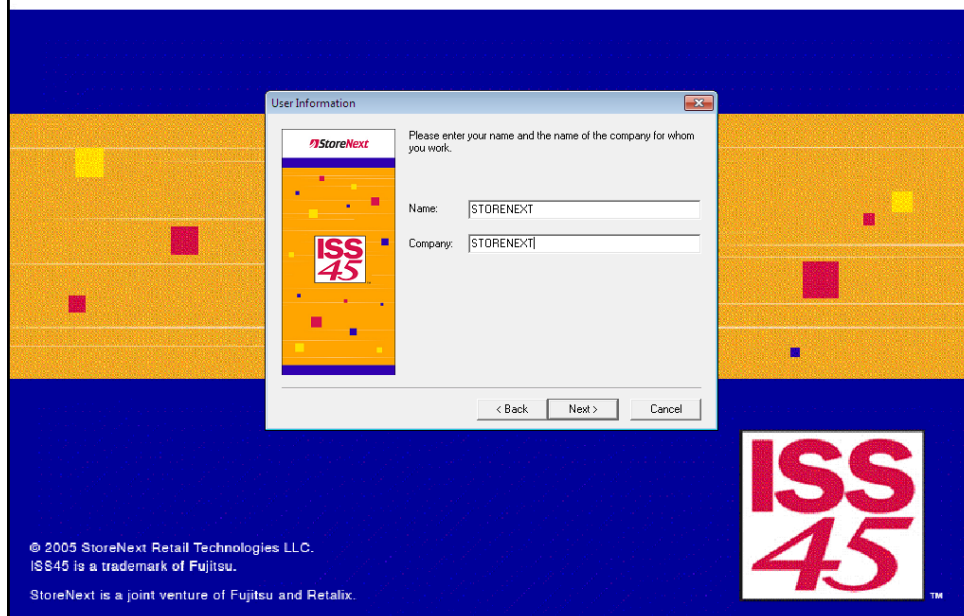

4 Click **Yes**.

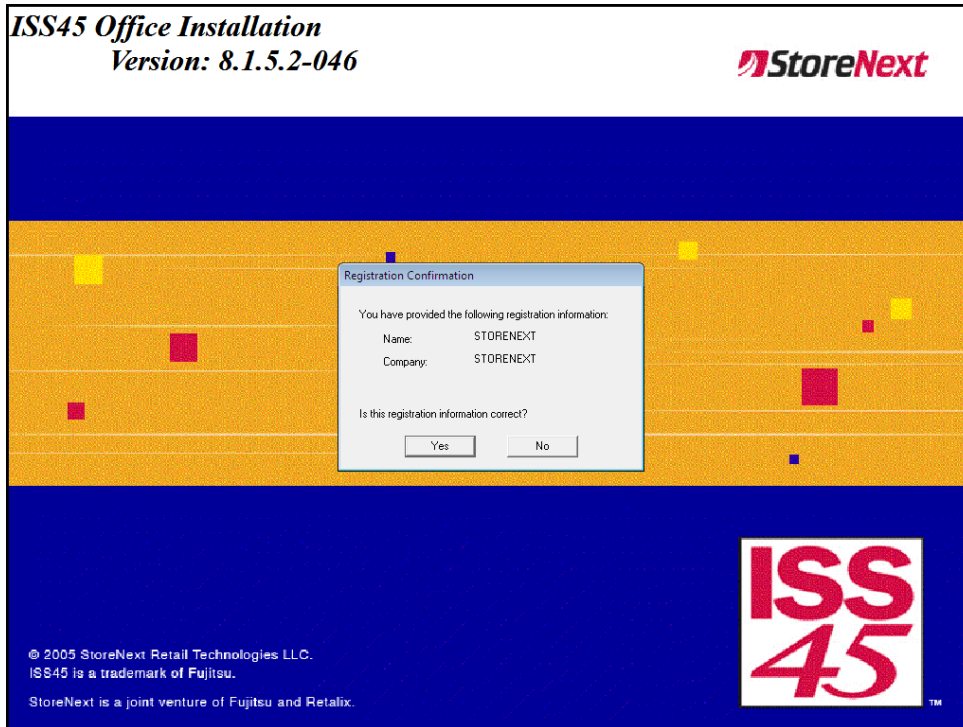


5 Click **Next** to accept default installation location.

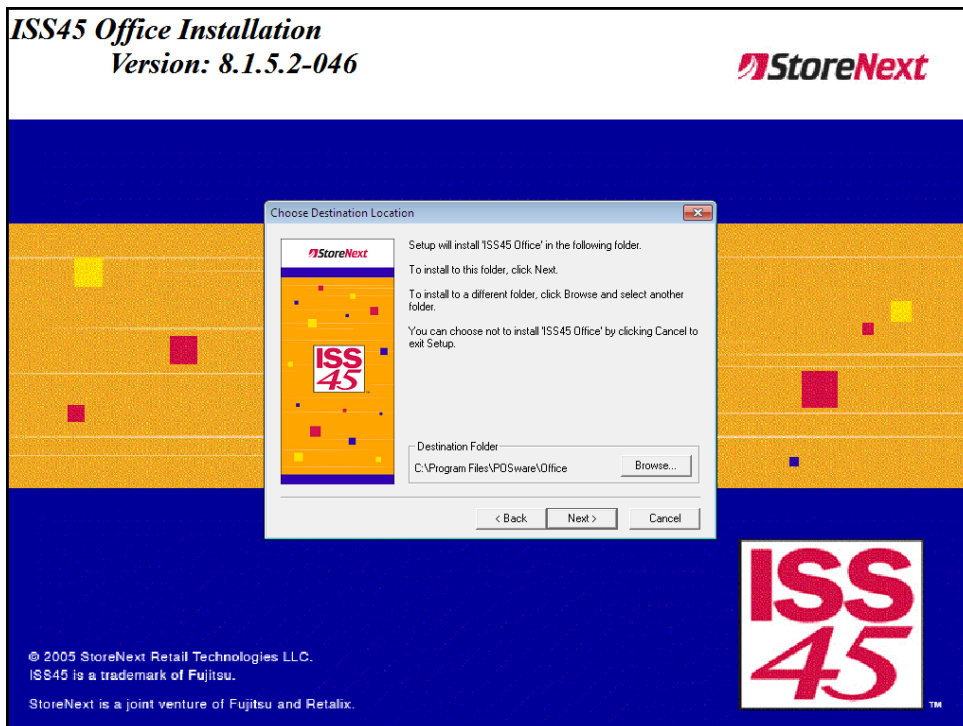


6 Select MFS2 and click **Next**.


ISS45 Office Installation Version: 8.1.5.2-046

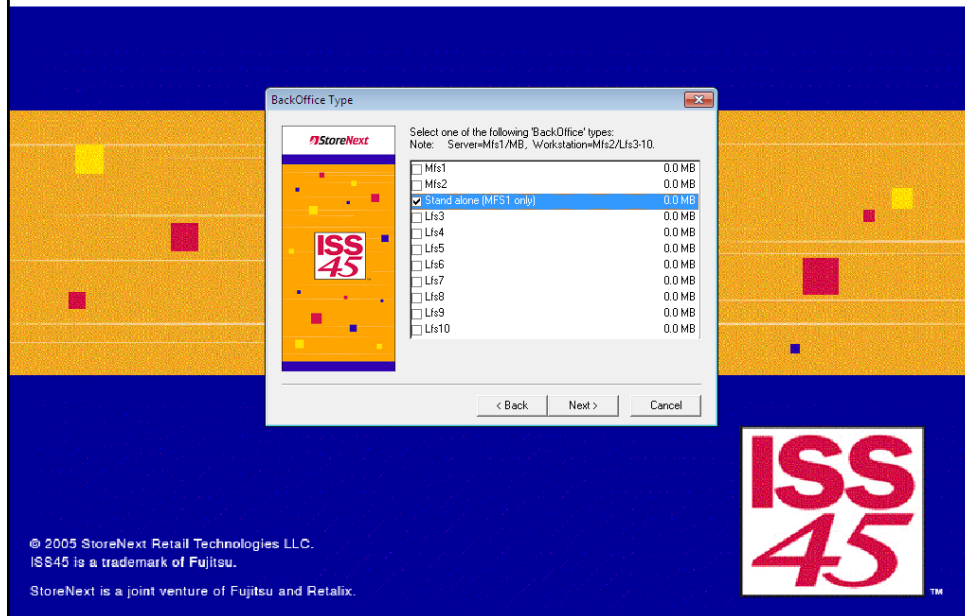


- 7 Select appropriate Report Format (default is Letter) and click **Next**.

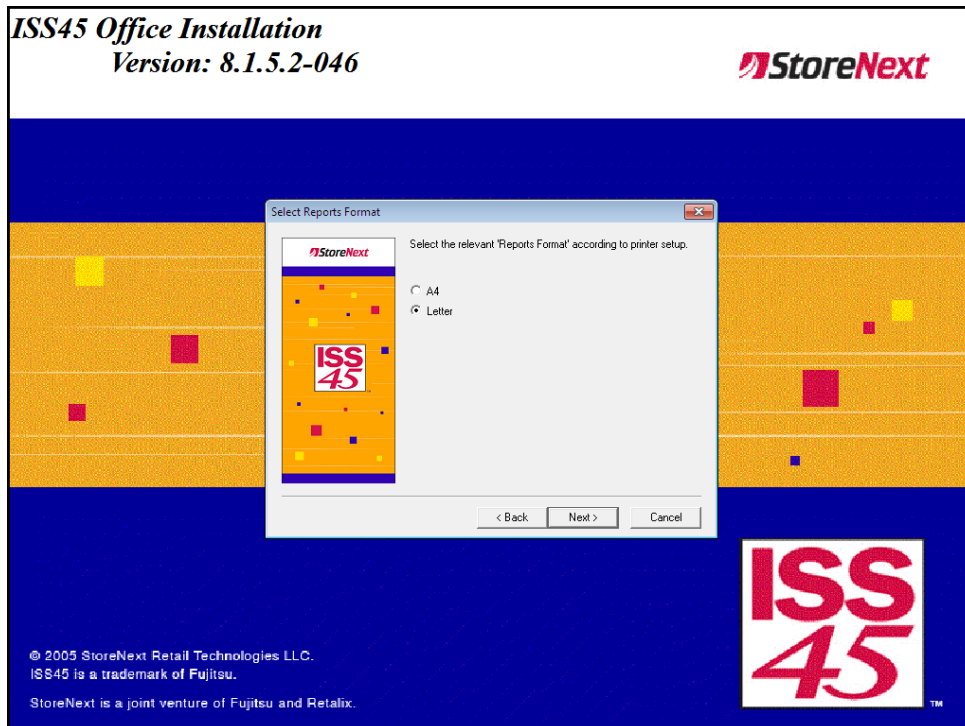

- 8 Enter the name of MFS1 and click on **Next**.

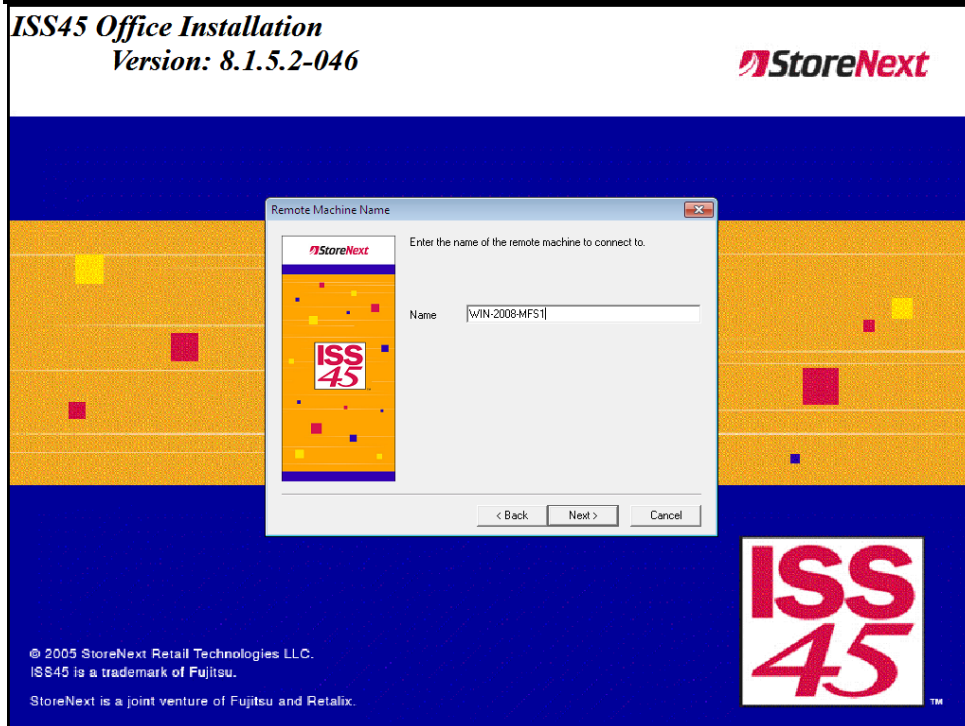


9 Click on **Yes** to test the connection to MFS1.

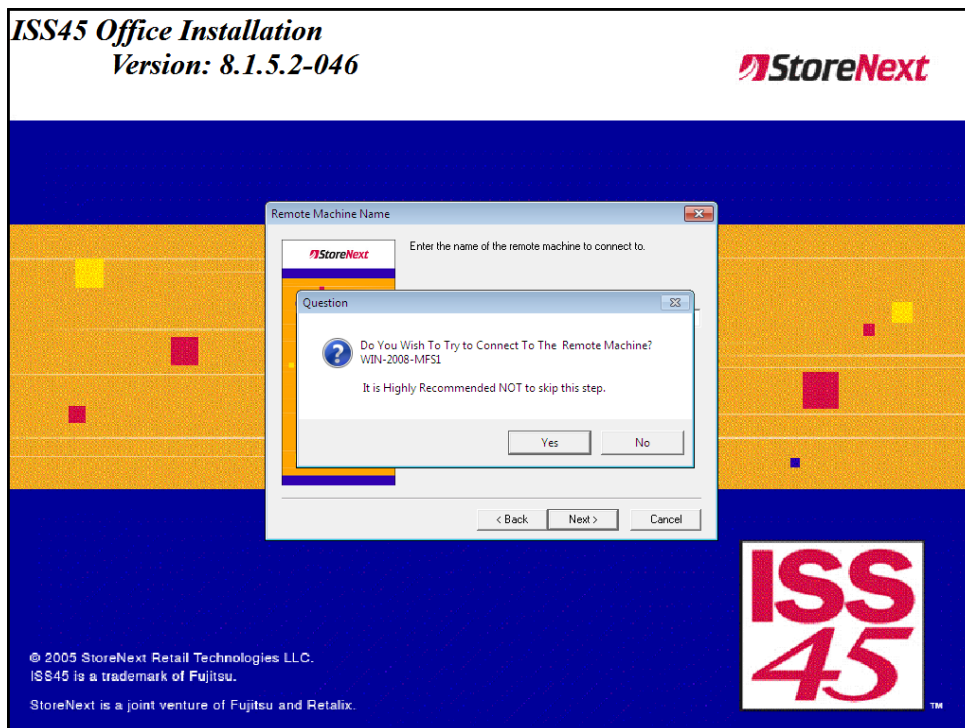

10 Select the appropriate answer for Fuel in System and click **Next**.

ISS45 Office Installation


Version: 8.1.5.2-046

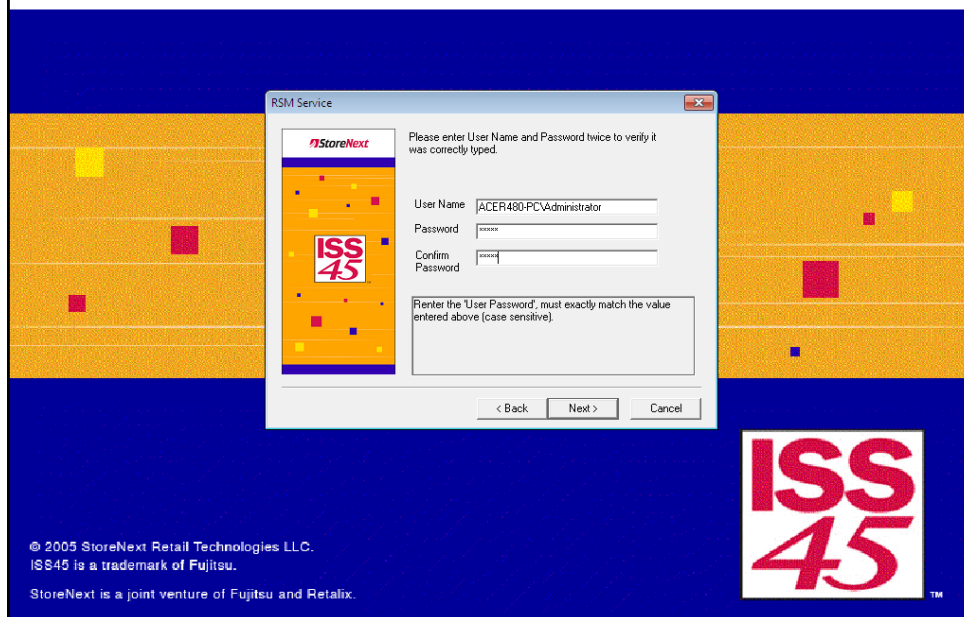

- 11 Enter and confirm Password for Administrator User and click **Next**.

ISS45 Office Installation


Version: 8.1.5.2-046

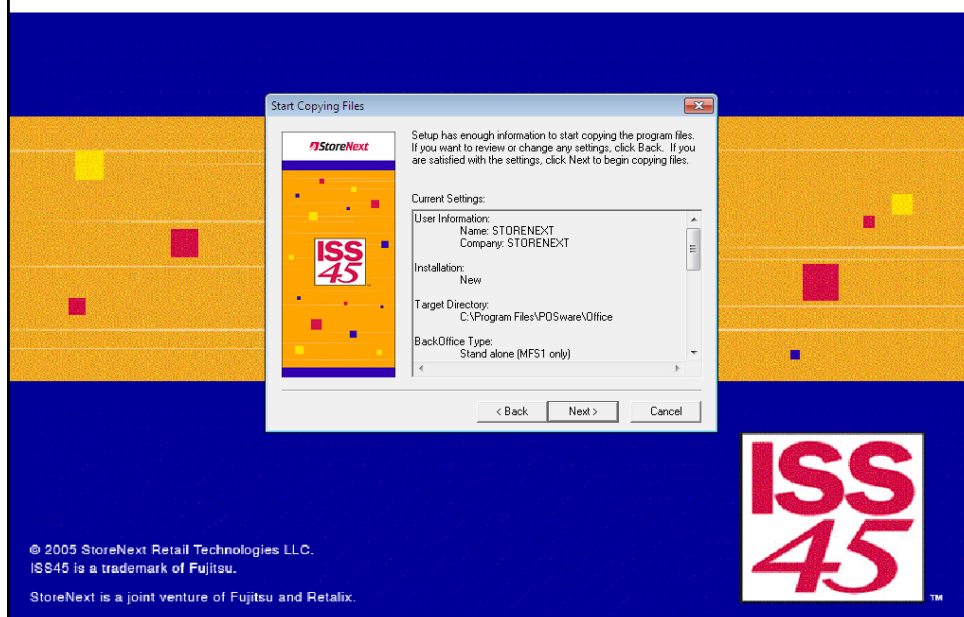


- 12 Click **Next** to proceed (or **Back** to make any changes).

ISS45 Office Installation

Version: 8.1.5.2-046

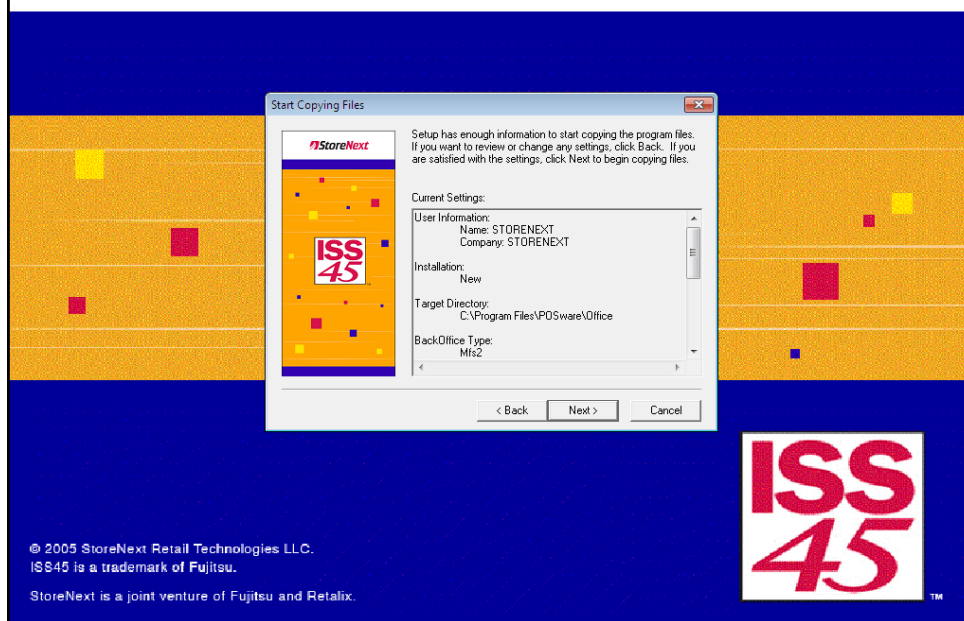


13 Click **Next**.

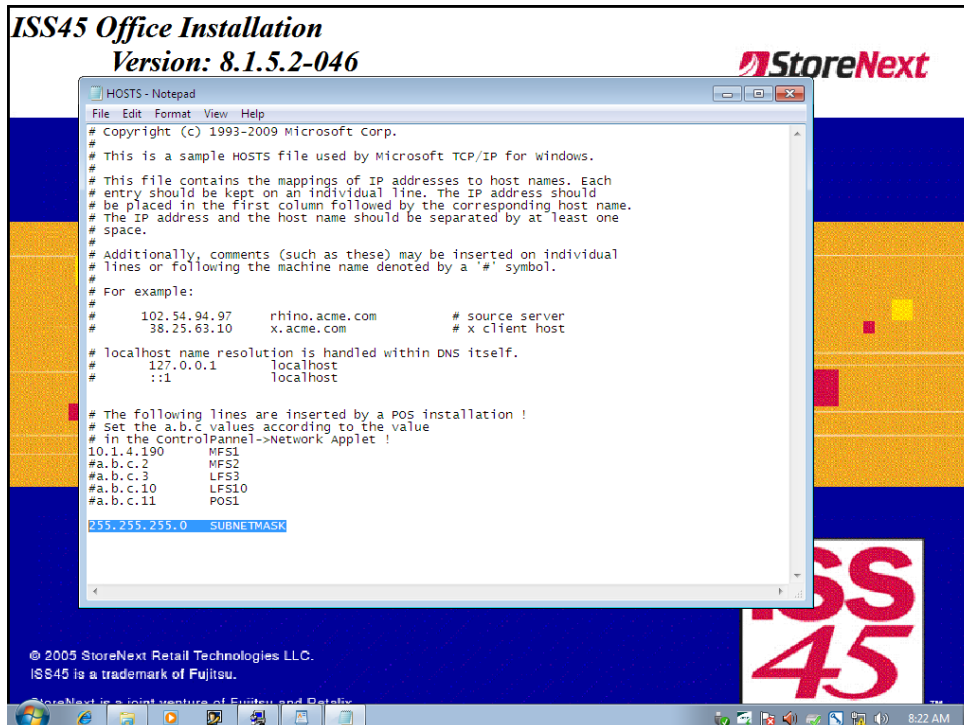

14 Edit the necessary lines, then save and close the Hosts file. Be sure to remove the # sign from the beginning of the SUBNETMASK entry (or services will not start after a reboot).

ISS45 Office Installation


Version: 8.1.5.2-046

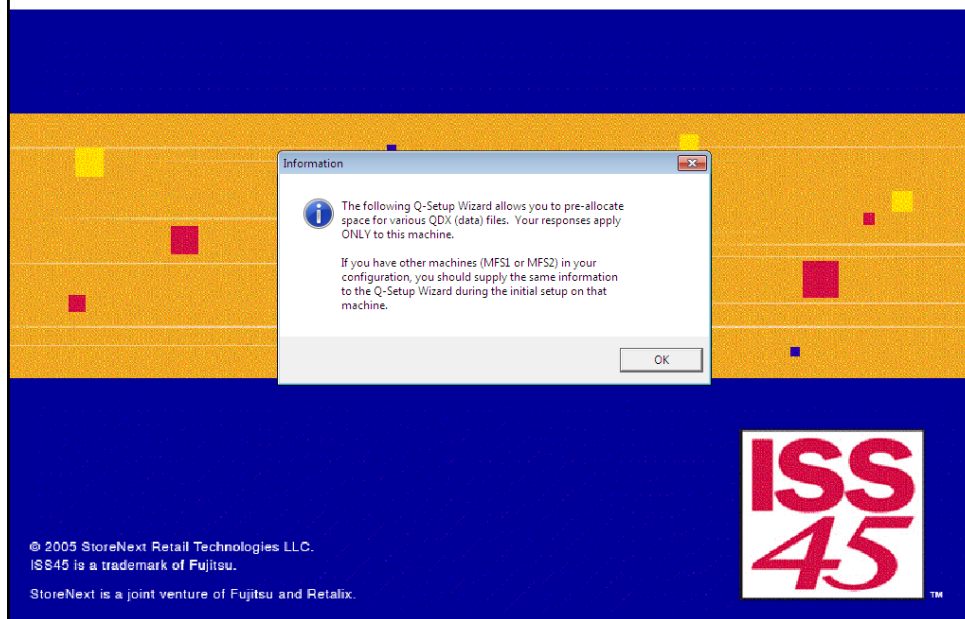


15 Click **OK** to proceed.

ISS45 Office Installation


Version: 8.1.5.2-046

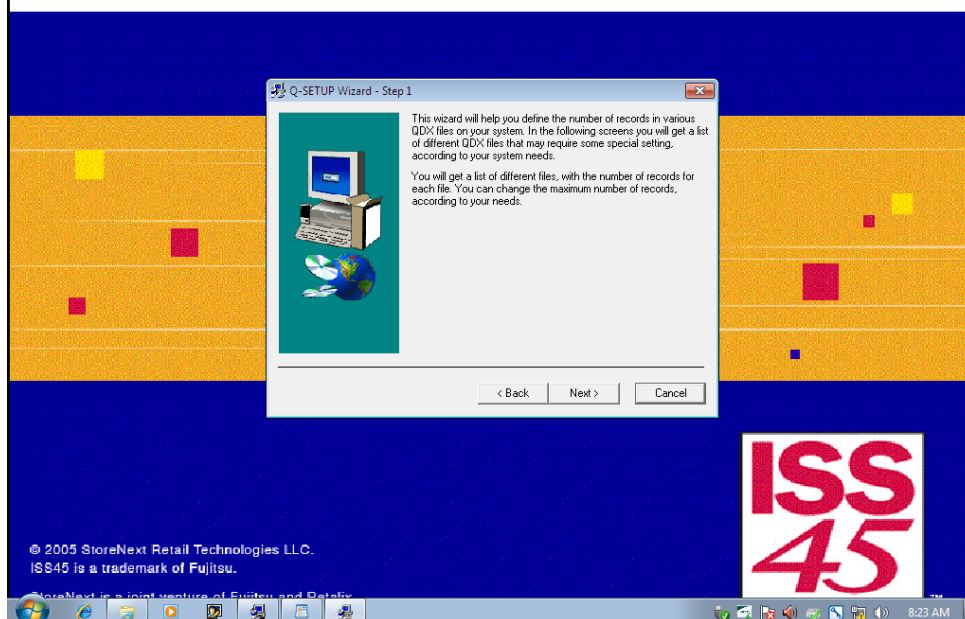

16 Click **Next** to proceed.

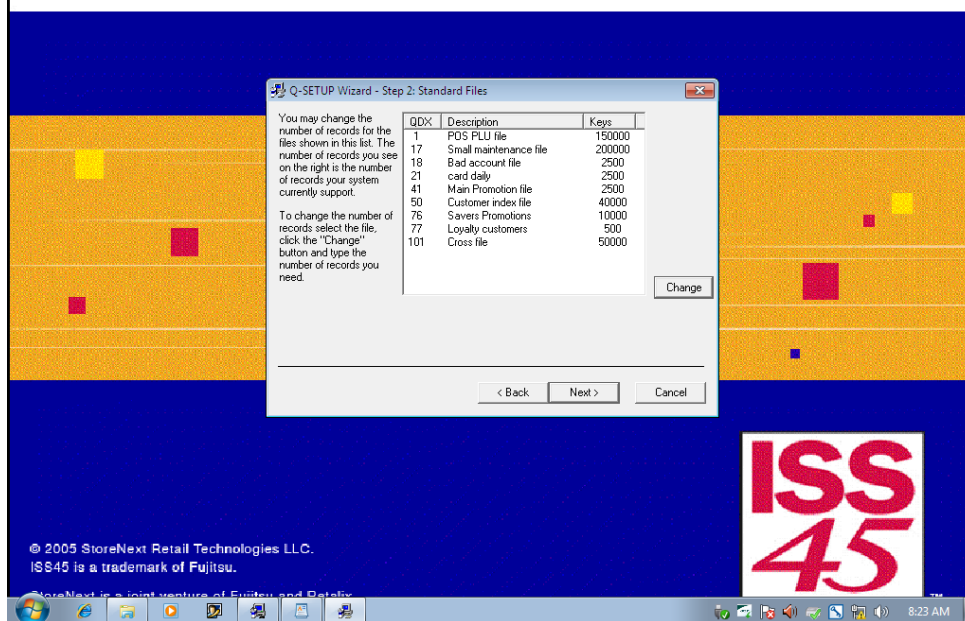


- 17 Click on Change to resize any of the qdx files or click Next to proceed.

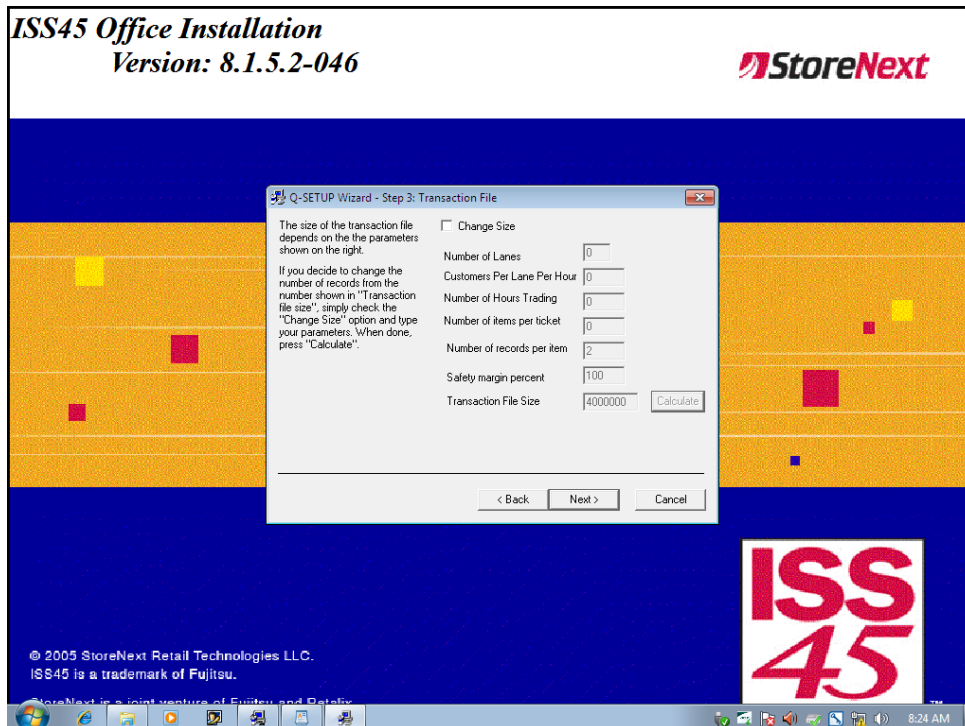


- 18 Click Next to proceed.


ISS45 Office Installation Version: 8.1.5.2-046

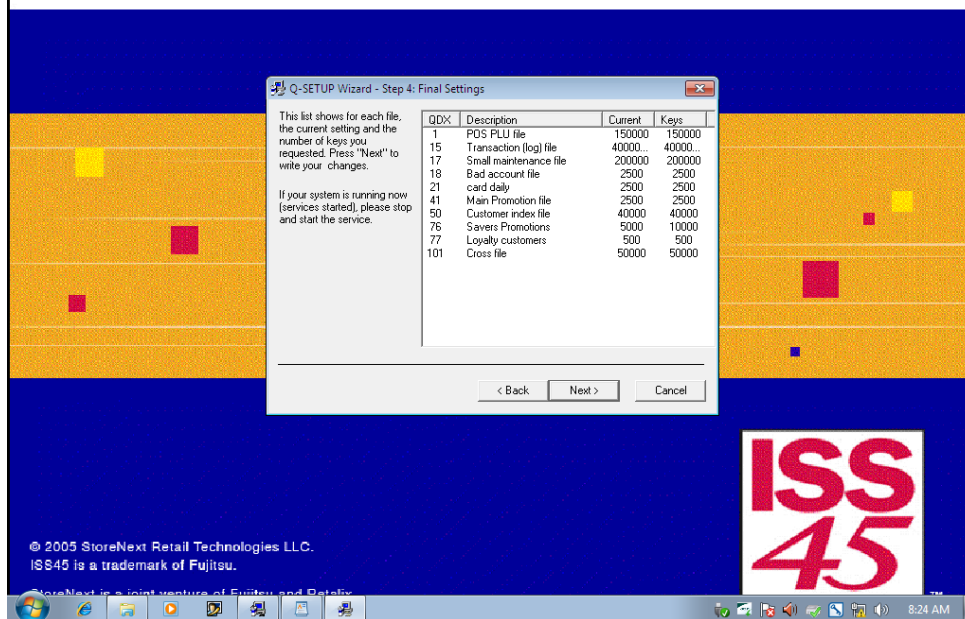


19 Click **Next** to proceed.

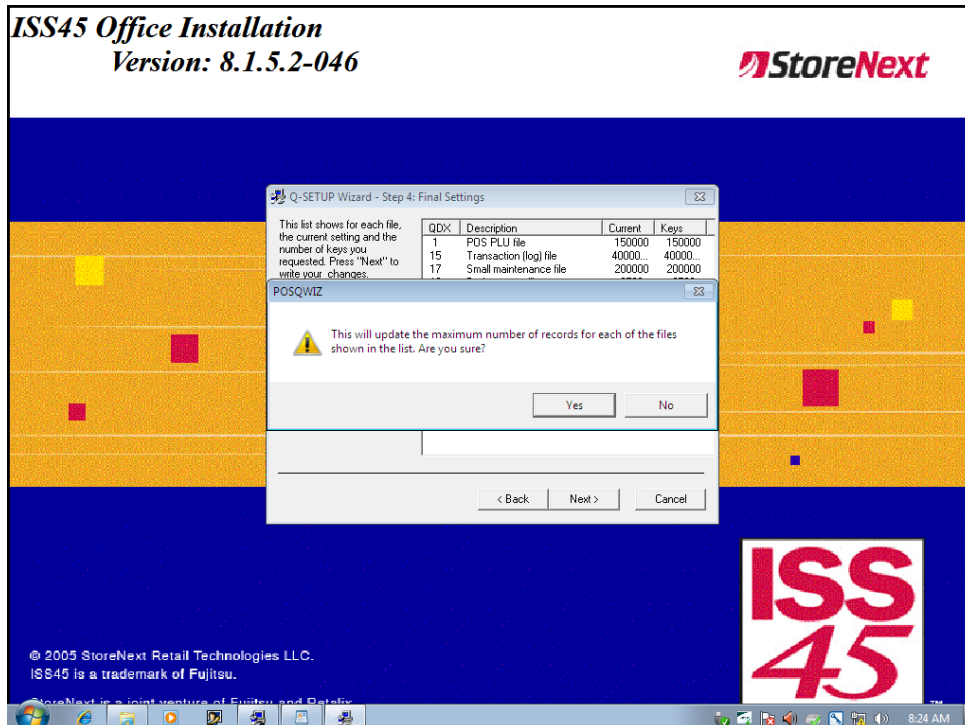


20 Click **Yes** to proceed.

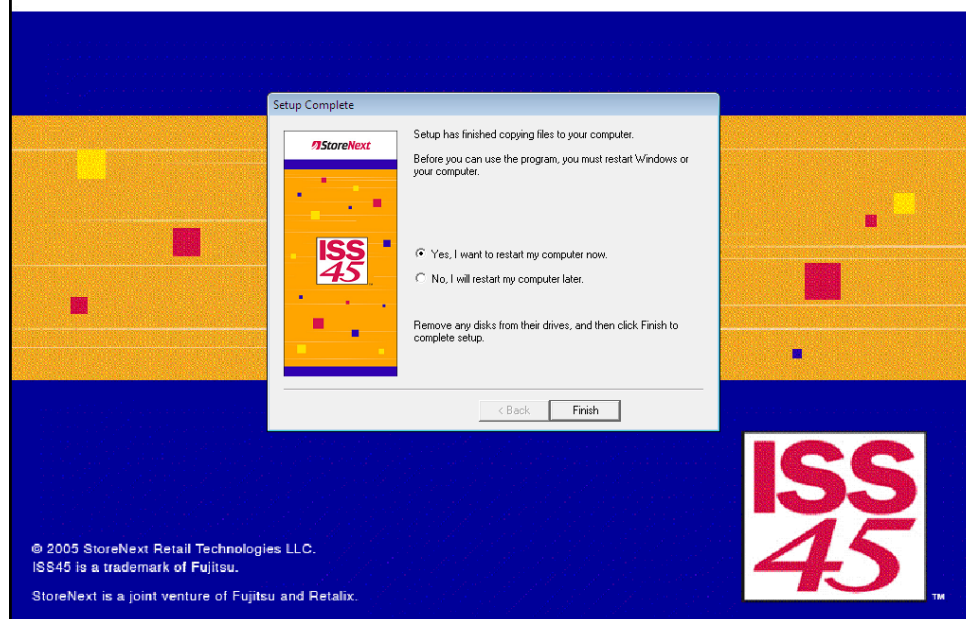

- 21 Click **Finish** to reboot computer immediately (or select No and click Finish to reboot manually at a later time). The HASP Plug may now be installed.
- 22 The following screen will be displayed after MFS2 has been rebooted and the admin user has logged back into Windows. Click on **Next** to open the Services Console:

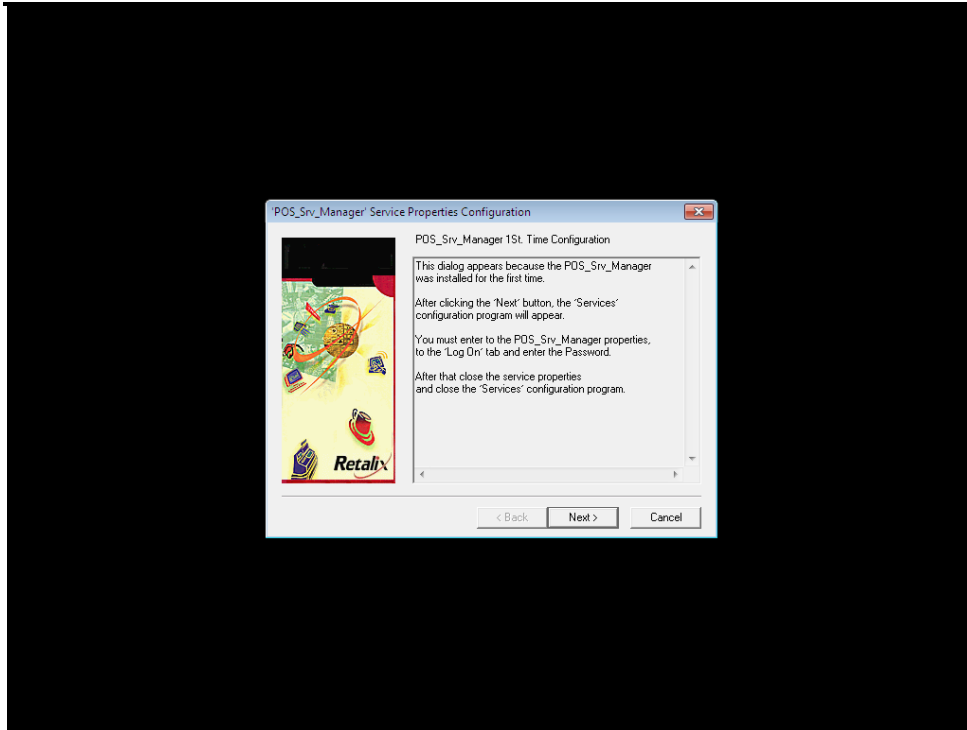


- 23 Edit the POS_SRV_Manager Service as shown below. Enter and confirm the password for the administrator user and click on OK.

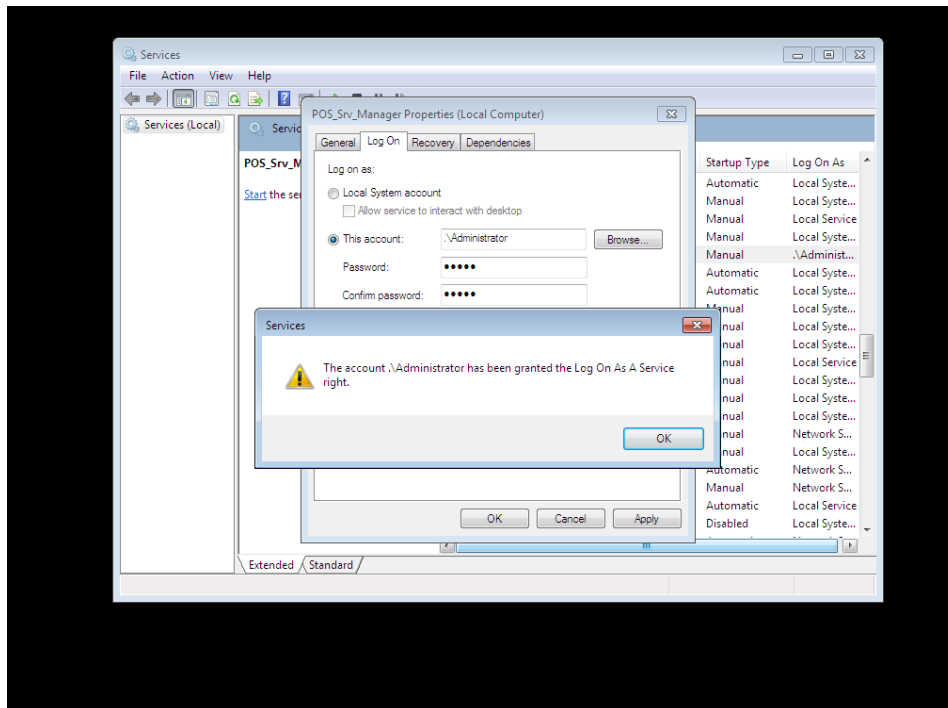

- 24 Click on **OK** to proceed.


- 25 Launch the Front Office application and sign in using the admin user and password created during the installation of MFS1. The LAN Crash Indicator light in the middle of the bottom of the screen will be Green when MFS1 and MFS2 are communicating successfully.

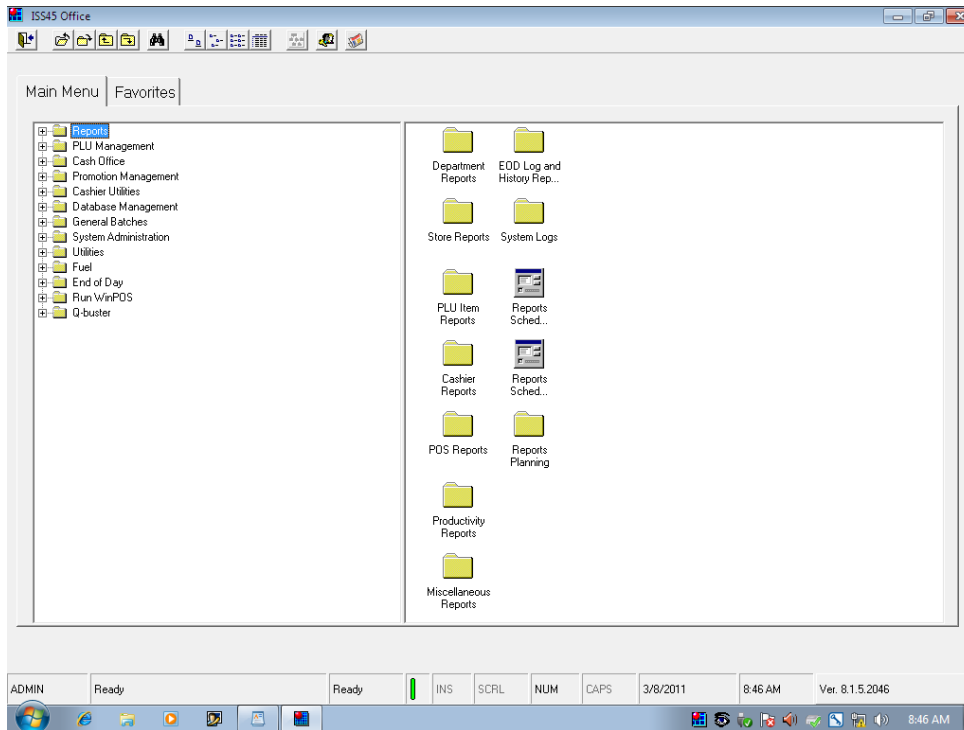


Note:

It is recommended that the ODBC connection to the FrontOff database be changed to increase the Long Query Time from 30,000 to 60,000 milliseconds. This will reduce the possibility of SQL Time Out errors when long running queries are performed against the database. Follow the steps outlined below to implement this change.


- 26 Open Data Sources (ODBC) from Administrative Tools.

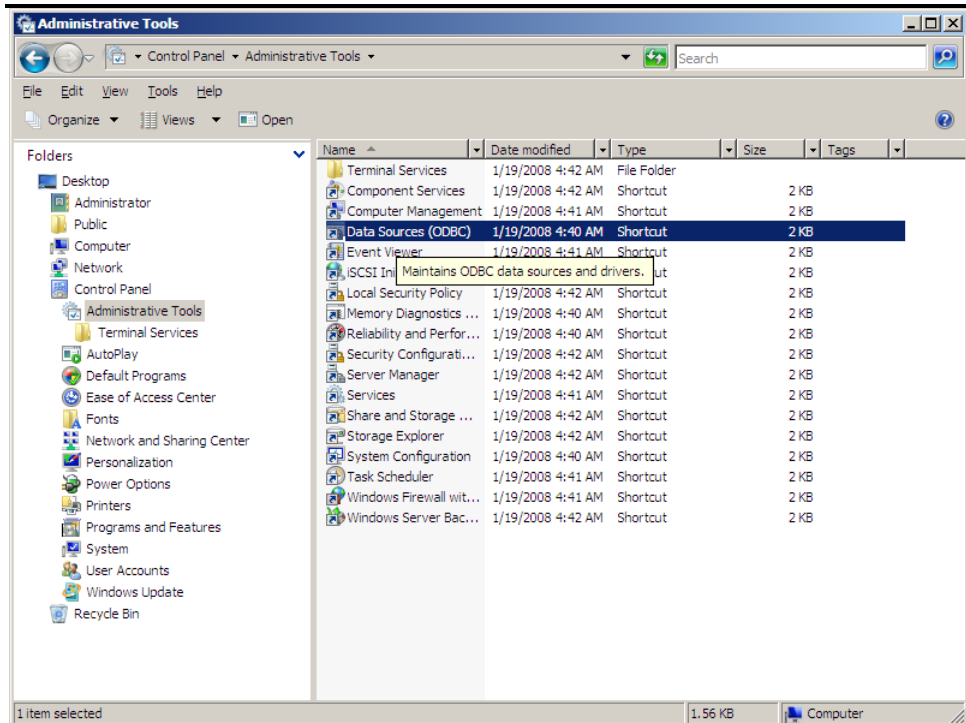


27 Click on the System DSN Tab, highlight FrontOff, and click on **Configure**.

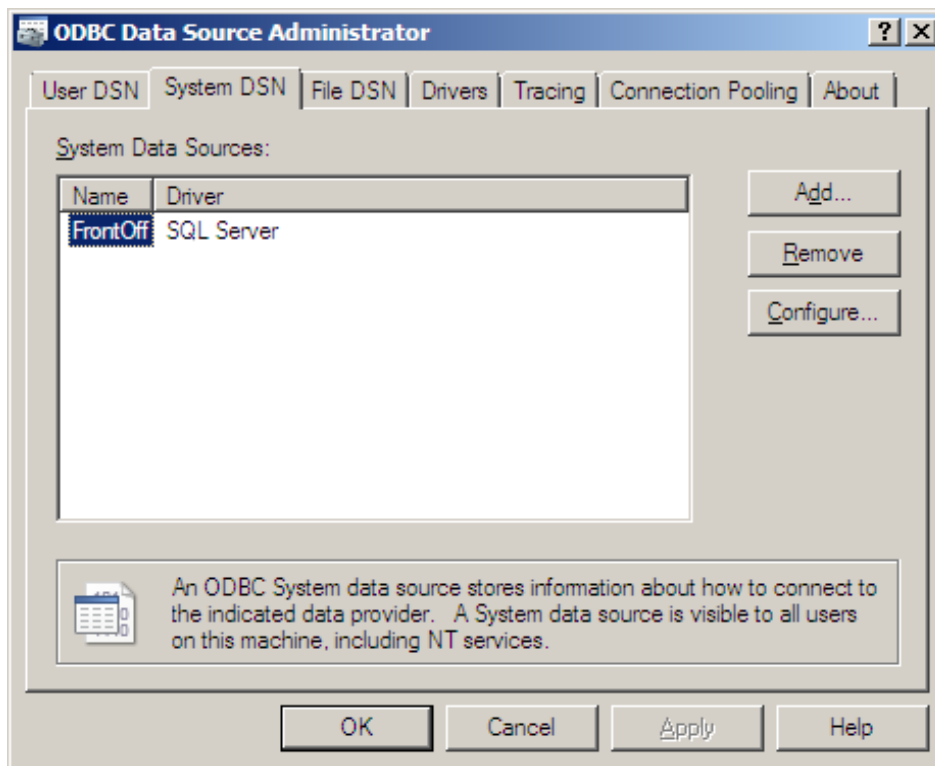


28 Accept defaults and click **Next**.

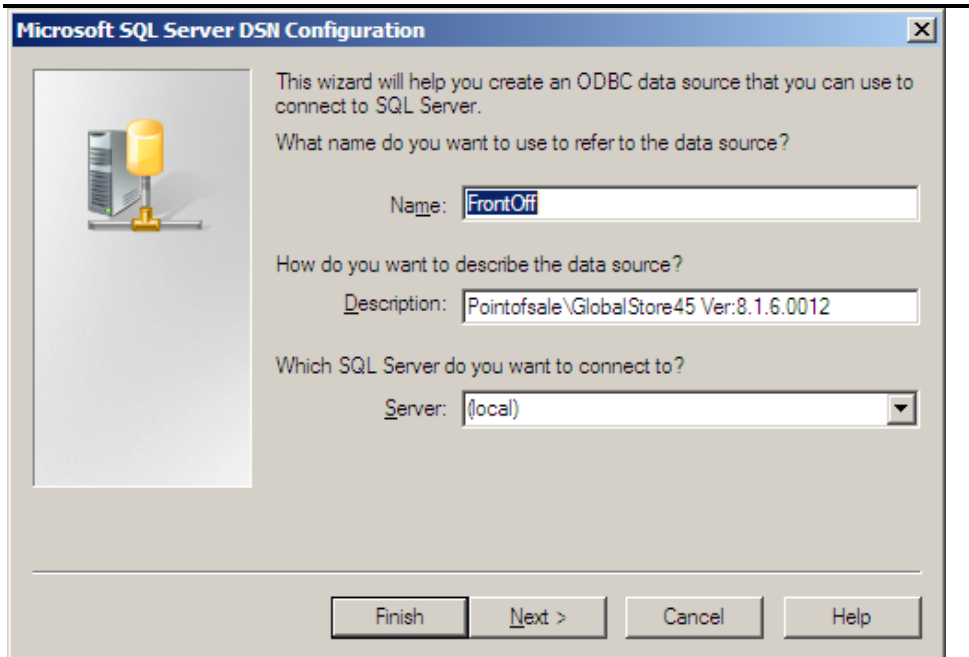


29 Accept defaults and click **Next**.

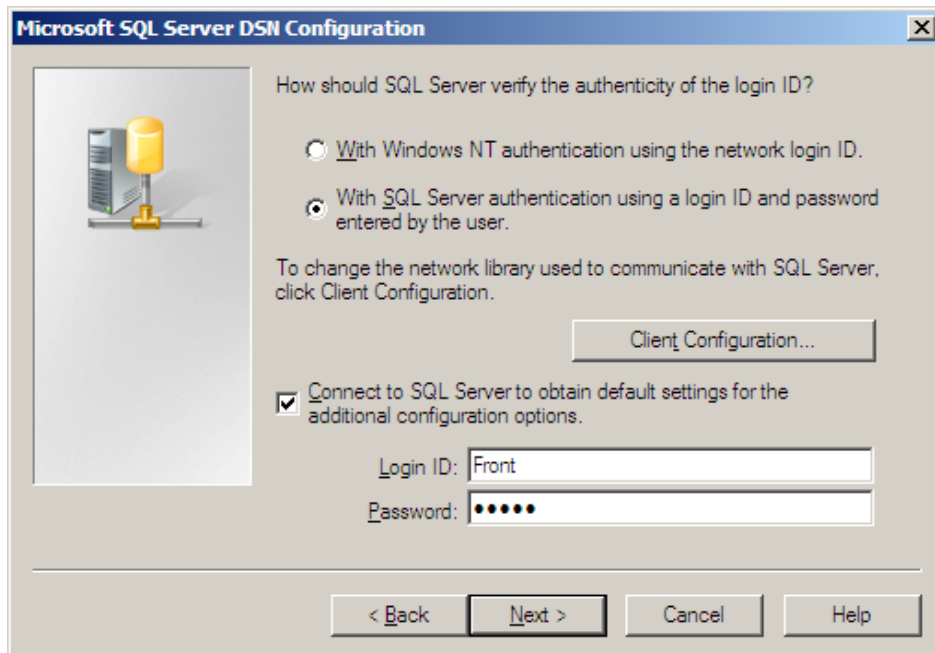


30 Select **With SQL Server authentication using a login ID and password entered by the user** and enter password Front (case sensitive).

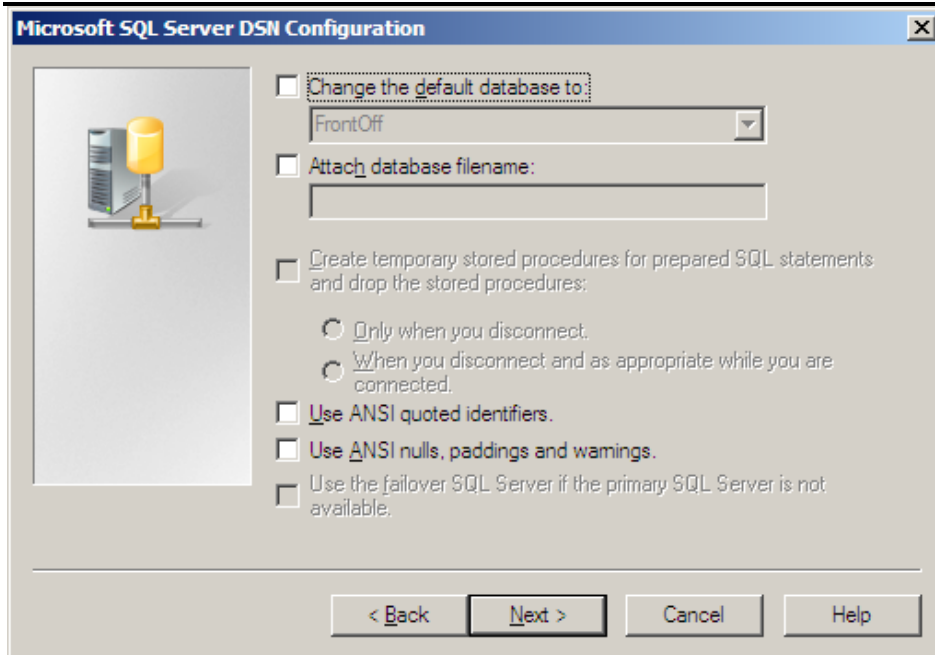


31 Click **Next**.

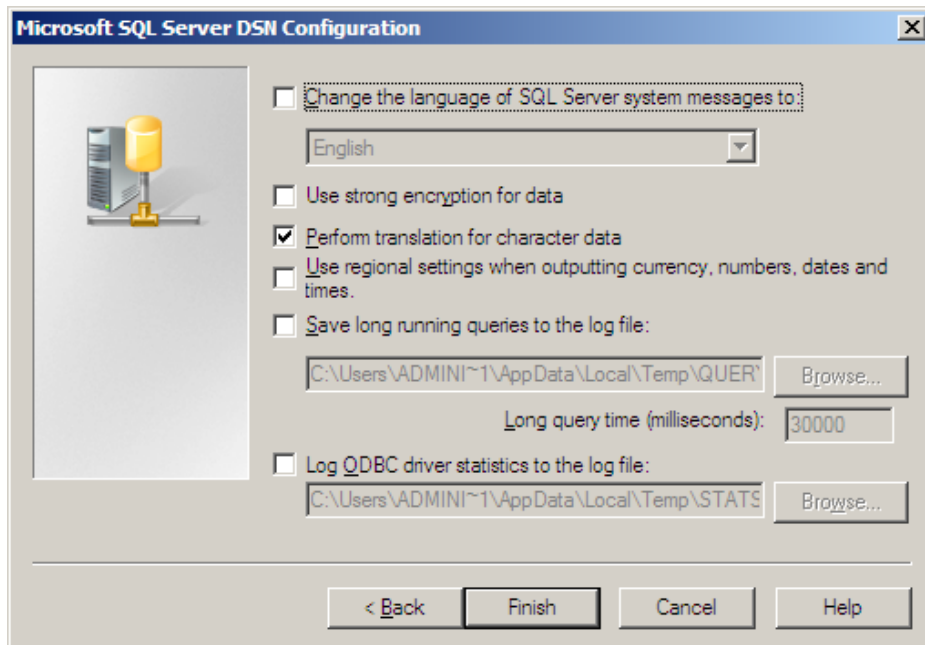


32 Select **Save long running queries to the log file** and change the 30,000 value to 60,000.

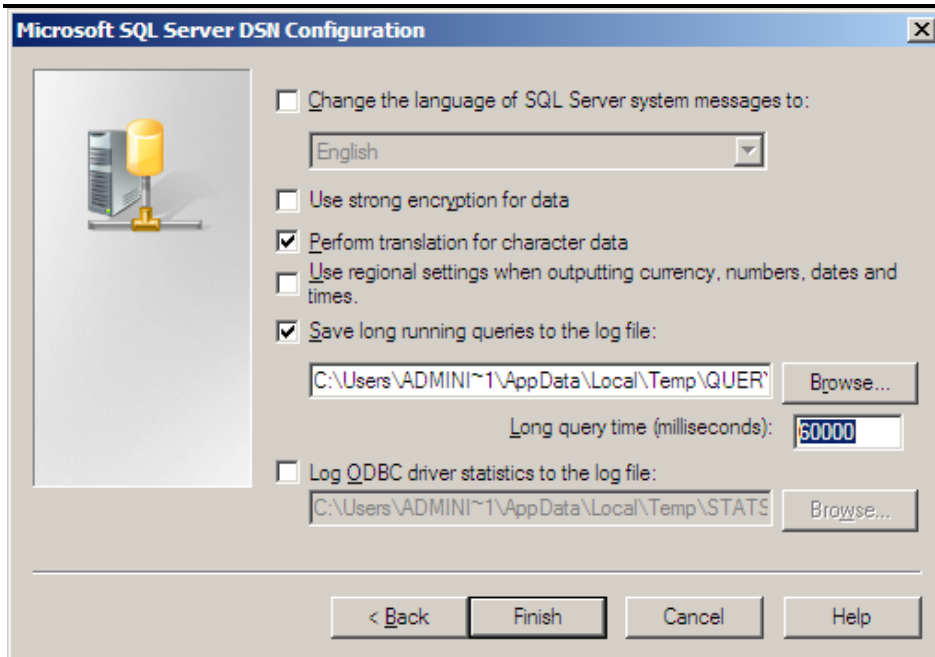


33 Click **Finish**.

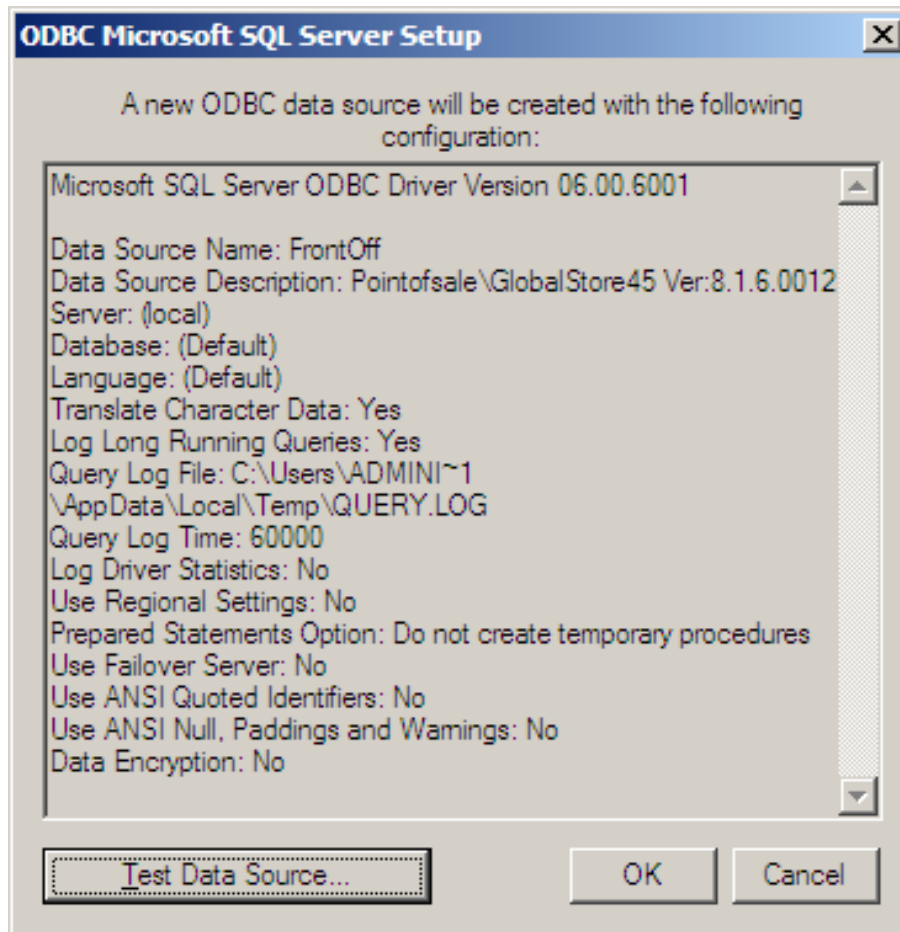

34 Click on **Test Data Source**.

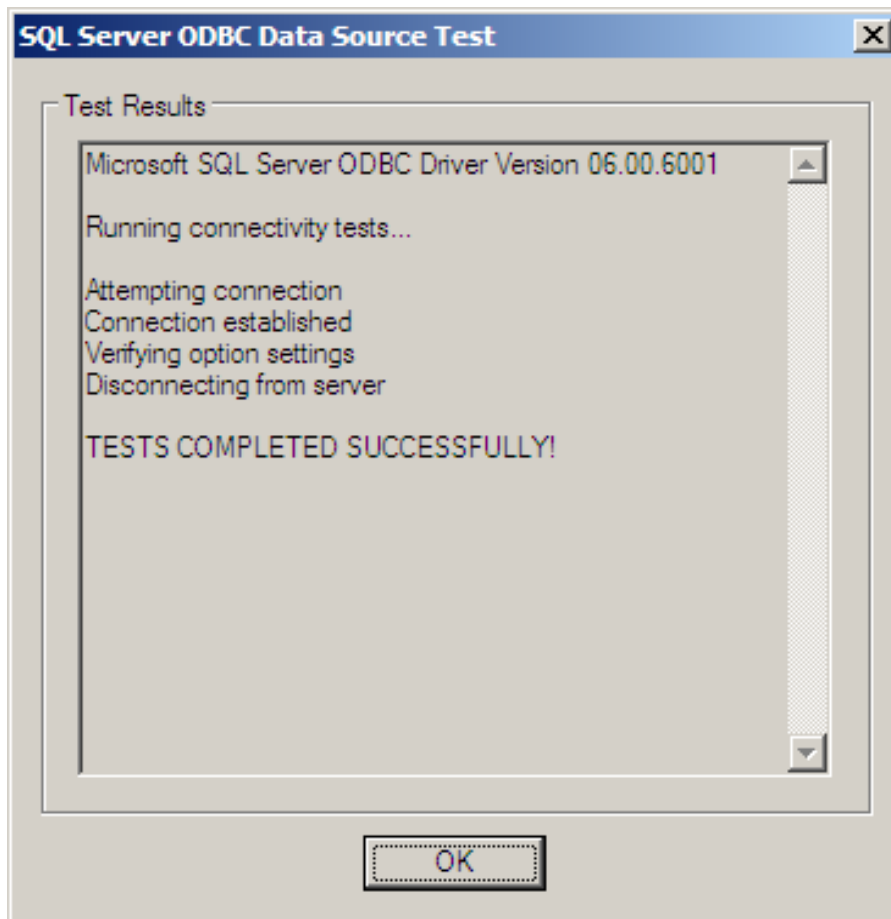

35 Click **OK**.

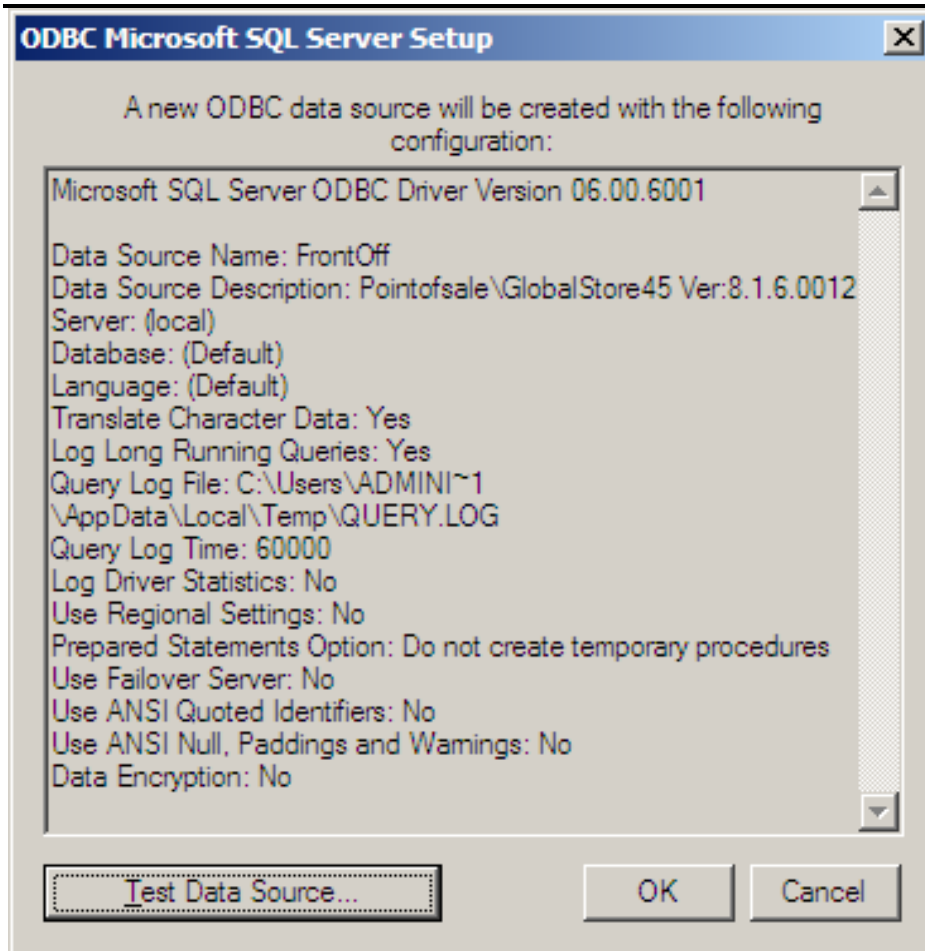

36 Click **Cancel**.



© NCR Corporation, 2015

NCR endeavors to ensure that the information in this document is correct and fairly stated but does not accept liability for any error or omission.

The development of NCR products and services is continuous and published information may not be up to date. It is important to check the current position with NCR. This document is not part of a contract or license, save insofar as may be expressly agreed.

NCR Corporation
2651 Satellite Blvd.
Duluth, GA 30096

P/N 89000841
PIN 45001/032